


# KP-POE1010

www.kenproctv.com | 02-2220559

## Features

- ▶ 8x10/100 Standard POE port
- ▶ 2x10/100M Uplink network Port
- ▶ In accordance with IEEE802.3, IEEE802.3u, IEEE802.3ab
- ▶ Internation POE standard IEEE802.3af/at
  - Support full port stand detection functionality
- ▶ Support port auto MDI/MDIX
- ▶ Single port POE power 30W
- ▶ 250 meter transmission (Option switch function)

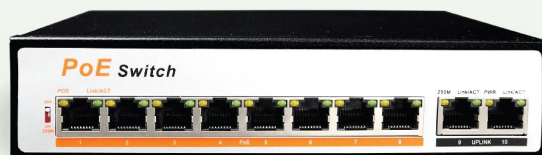

## SPECIFICATION

Model		KP-POE1010
Port	POE	8
	100M-RJ45	8
	Uplink	2
	1000-SFP	N/A
Performance	Storage and forward	Support
	Exchange capacity	2G
	MAC Address	2048
	POE Standard	IEEE802.3af, IEEE802.3at Single Port 30 W, 104W Max.
Power	Power In	AC 100 ~ 240V 50/60HZ
	Power Out	52W
Environment		Working Temperature : 0 ~ 40 C Storage Temperature : - 40 ~ 70 C
		Working Temperature : 10% ~ 90% RH Non-condensation Storage Temperature : 5% ~ 90% RH Non-condensation
Supported Standards and Protocols		IEEE 802.3 Ethernet Medium Access Control Protocol IEEE 802.3i 10BASE-T Ethernet IEEE 802.3u 100BASE-TX Fast Ethernet IEEE 802.3at Ethernet Power Supply Realized Through Ethernet Equipment or Data Line IEEE 802.3at Large Ethernet Power Supply Realized Through Ethernet Equipment or Data Line IEEE 802.3x Flow Control
Function mode		Standard share/250 meter transmission
Data Transmission Rate		Ethernet 10Mbps Half Duplex 100Mbps Half Duplex
Network Medium		10Base-T: 2 pairs of Cat 3 or above UTP/STP (100m) 100Base-TX: 2 pairs of Cat 5 or above UTP/STP (100m)