
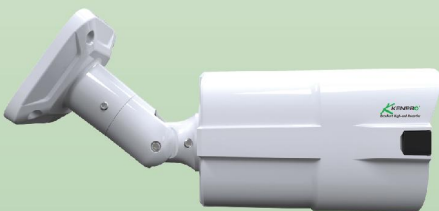


## Features

- ▶ HD 1080P Resolution, Image Clear, Delicate
- ▶ Auto electronic shutter time
- ▶ 500M transmission without delay
- ▶ Support coaxial control
- ▶ Support coaxial upgrade

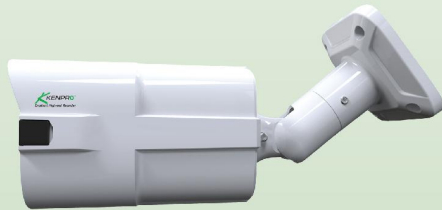

## SPECIFICATION

| SPECIFICATION                | KP-1911   |
|------------------------------|---|
| <b>VIDEO</b>                 |   |
| Image Sensor                 | 1/2.7" 2.0M Low illumination CMOS sensor  |
| Resolution                   | 1920 x 1080   |
| Lens                         | HD Lens f3.6mm @F1.8  |
| IRIS Control                 | N/A   |
| Minimum Illumination         | Color:0.01LUX@(F1.2,AGC on);0LUX with IR ,<br>B/W:0.001LUX@(F1.2,AGC on);0LUX with IR |
| Electronic Shutter Speed     | 1/50(1/60)s to 1/10,000s  |
| Day/Night                    | IR cut lter with auto switch  |
| IR LEDs                      | 25 LEDs; 30 M   |
| Video Out                    | AHD/TVI/CVI@1080P   |
| <b>FUNCTION</b>              |   |
| WDR (Wide Dynamic Range)     | D-WDR   |
| BLC (Backlight Compensation) | Yes   |
| HSBLC                        | N/A   |
| Motion Detection             | N/A   |
| Privacy Masking              | N/A   |
| Day&Night                    | Auto/Color/B&W  |
| White Balance                | Auto/Manual   |
| Digital Noise Reduction      | 2D/3D DNR   |
| Mirror                       | Yes   |
| De-fog                       | N/A   |
| <b>ENVIRONMENTAL</b>         |   |
| Out-Door Ready               | IP67  |
| Operating Temperature        | -10°C ~ 60°C (Humidity : 10% ~ 90% RH)  |
| <b>ELECTRICAL</b>            |   |
| Power Source                 | DC 12V(10%)   |
| Power Consumption            | Max. 3W   |
| <b>MECHANICAL</b>            |   |
| Dimensions(HxWxD)            | 59mm x 62.5mm x 210mm   |
| Weight                       | Around 480g   |