




# Outdoor PTZ IP Camera

Full HD 1080P, 20X Optical Zoom.

## KP-IPX620P5NV

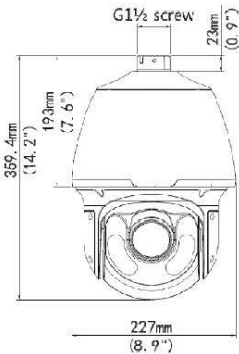


- Ultra 265,H.265, H.264, MJPEG
- Accurate and fast focusing
- The third-generation infrared technology
- Smart IR, up to 150 m (492ft) IR distance
- Ingress Protection IP66
- ONVIF Conformance

### Specifications

Camera	
Sensor	1/3", progressive scan, 2.0megapixel, CMOS
Lens	5.2 ~ 104 mm (20x optical zoom) , AF automatic focusing and motorized zoom lens
Angle of View (H)	61.9° (wide) ~ 3.5° (tele)
Shutter	Auto/Manual; shutter time: 1/6 s ~ 1/100000 s
Minimum Illumination	Colour: 0.03 lux (F1.5, AGC ON) B/W: 0.01 lux, 0 lux with IR
Iris	Auto/Manual; F1.5 ~ F3.0
Day/Night	IR-cut filter with auto switch (ICR)
Digital noise reduction	2D/3D DNR
S/N	>52dB
IR Range	UP to 150m (492ft)
Defog	Digital Defog
WDR	DWDR
Video Compression	Ultra 265,H.265, H.264, MJPEG
H.264 code profile	Baseline profile, Main Profile, High Profile
Frame Rate	Main Stream:2MP (1920×1080):Max. 30 fps;Sub Stream:2MP (1920×1080): Max. 30 fps; Third Stream: D1 (720×576): Max. 30 fps
HLC,BLC,EIS	Supported
OSD	Up to 8 OSDs
Privacy Mask,ROI	Up to 8 areas
Motion Detection	Up to 4 areas
Audio Compression	G.711, Two-way audio,Suppression,Sampling Rate 8 KHZ
Edge Storage	Micro SD, up to 128 GB
Network Storage	Supported ANR
Protocols	IPv4,IPv6,IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP
Compatible Integration	UPnP, HTTP, HTTPS, SMTP, 802.1x,SNMP: ONVIF(Profile S, Profile G), API
Pan Range Pan Speed	360° (endless), 0.1°/s ~ 240°/s, Preset speed: 300°/s
Tilt Range Tilt Speed	-15° ~ +90° (auto reverse), 0.1° ~ 160°/s, Preset speed: 240°/s
Alarm I/O	1/ 1
Network	1 RJ45 10M/100M Base-TX Ethernet
Power	24 V AC±25%, 24 V DC±25%, PoE (PSE Required)
Working Environment	-40°C ~ +65°C (-40°F ~ 149°F), Humidity :10%~95% RH(non-condensing)

### Installation



Specifications subject to change without notice

Import Distribute Install and Service by



**SGD INTER TRADING CO., LTD.**

54/5-6, Soi Nawang, Charoenkrung Road,  
Wangburapapirom, Pranakorn, Bangkok 10200, Thailand

Tel. 0-2222-0559 (AUTO), 0-2622-2088 (AUTO)  
Fax. 0-2226-3031

www.kenprocctv.com | e-mail: sgdinter@fujiko.biz



www.kenprocctv.com



www.facebook.com/  
fujiko.ctv